

HLBV series

Lever Operated High Pressure Ball Valves

10000 psi Pressure Rating





Features

3 piece Design and Square Body

Robust Body that is best suited for High Pressure application

Floating Ball Design ensures leak proof shut off at high Pressures

Seats and Packings are replaceable

Maximum Orifice minimises Pressure Drops


Stem is internally loaded and Anti Blow out design

100% factory Tested

Working Pressure of 10000 psi at 21 Deg Centigrate

Available in SS316/L, and Exotic Alloys also

Design

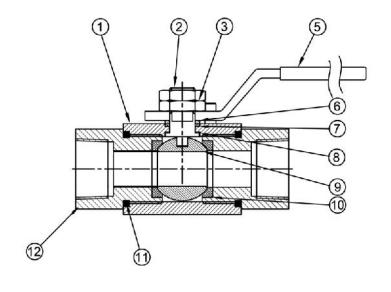

Temperature Rating

Pressure

10,000 psig (690 bar)

Temperature

-54 Deg C to +260 Deg C

Testing


All Valves are 100% tested for 1.5 times Working Pressure for Shell Test


No.	Description	Material
1	Body	SS316
2	Stem	SS316
3	Lock Nuts	SS316
4	Dowel	Stainless Steel
5	Handle	Stainless Steel
6	Gland	SS316

No.	Description	Material	
7	Stem Seal	PTFE	
8	Backup Seal	PTFE	
9	Ball	SS316	
10	Seat	PEEK	
11	O Ring	Viton	
12	Side Connector	SS316	

Dimensions of Ball Valve






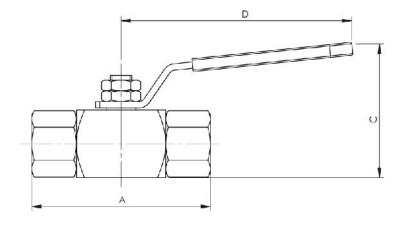

Size	Model No.	Α	В	С	D	Orifice
1/4" NPTF	HLBV-4F	61.0	32.0	63.5	84.0.	10.0
3/8" NPTF	HLBV-6F	61.0	32.0	63.5	84.0	10.0
1/2" NPTF	HLBV-8F	86.0	32.0	63.5	104.0	10.0
3/4" NPTF	HLBV-12F	105.0	40.0	71.0	165.0	12.7
1" NPTF	HLBV-16F	124.0	50.0	81.0	165.0	19.0
1/4" NPTM	HLBV-4N	66.0	32.0	63.5	84.0	10.0
3/8" NPTM	HLBV-6N	66.0	32.0	63.5	84.0	10.0
1/2" NPTM	HLBV-8N	92.0	32.0	63.5	104.0	10.0
3/4" NPTM	HLBV-12N	111.0	40.0	71.0	165.0	12.7
1" NPTM	HLBV-16N	130.0	50.0	81.0	165.0	19.0

Ordering Information



N - NACE MR 0175

L - Handle Locking Arrangement

P - Plastic Handle

PM - Panel Mounting Arrangement

vipal enterprises pvt ltd

32, 34 Blue Chip Industrial Estate No.5, Sativali Road, Vasai East, Thane 401208, Maharashtra, India.

Email: sales@havi.in Website: www.havi.in